

To: **Plan holders for Aberdeen Park Pickleball and Tennis Court Renovation – Belvidere Park District**
via Email ONLY

From: Tony Williams, Superintendent (Jen Jacky, Director) – Belvidere Park District
Arc Design Resources, Inc. (engineer)

Date: February 21, 2025

Re: **Addendum #1 - Aberdeen Park Pickleball and Tennis Court Renovation**

This addendum forms a part of the Bidding and Contract Documents and modifies the original bidding documents issued on January 14, 2025. Acknowledge receipt of this addendum by returning the attached acknowledgement form with your bid.

FAILURE TO ACKNOWLEDGE RECEIPT OF ADDENDA MAY DISQUALIFY BIDS.

GENERAL

1. Clarification:
The Belvidere Park District (owner) has purchased and will provide the pickleball and tennis equipment (net posts, net anchors, nets, etc.) to be coordinated and dropped at the site when necessary.
2. Clarification:
In the Tennis Court Equipment specification Part 1-General, section 1.2 Summary, items A. 3. Tennis court signs and 4. Tennis court windscreen ties, these items **will not** be included in the project and shall not be necessary.
3. Clarification:
It is preferred and suggested that the construction access traffic use a route adjacent to the existing path to avoid damage to the path. Adequate protection of the path is required as there is **no intent or budget to replace the path**. The contractor is to use the turf area adjacent to the path and/or provide temporary gravel and full restoration of turf at the completion of the project.
4. Clarification:
The Park District will only be accepting "lump sum" bids for construction of this project and will not be accepting separate bids for individual or limited scope site improvements.


C-04 DETAILS

5. 4' HIGH CHAIN LINK FENCE DETAIL:
The line/gate posts are to be 2.5" OD; the corner/end posts are to be 3" OD; Posts are to be 3'-6" (42") depth and can either be augured (10" line/gate, 12" end/corner) and set in concrete, cored and sealed with silicone, or driven into the ground depending on the location or application.
6. 10' HIGH CHAIN LINK FENCE DETAIL:
The line/gate posts are to be 2.5" OD; the corner/end posts are to be 3" OD; Posts are to be 5'-0" (60") depth and can either be augured (10" line/gate, 12" end/corner) and set in concrete, cored and sealed with silicone, or driven into the ground depending on the location or application.

End of Addendum 1


4' HIGH CHAIN LINK FENCE DETAIL

NOT TO SCALE

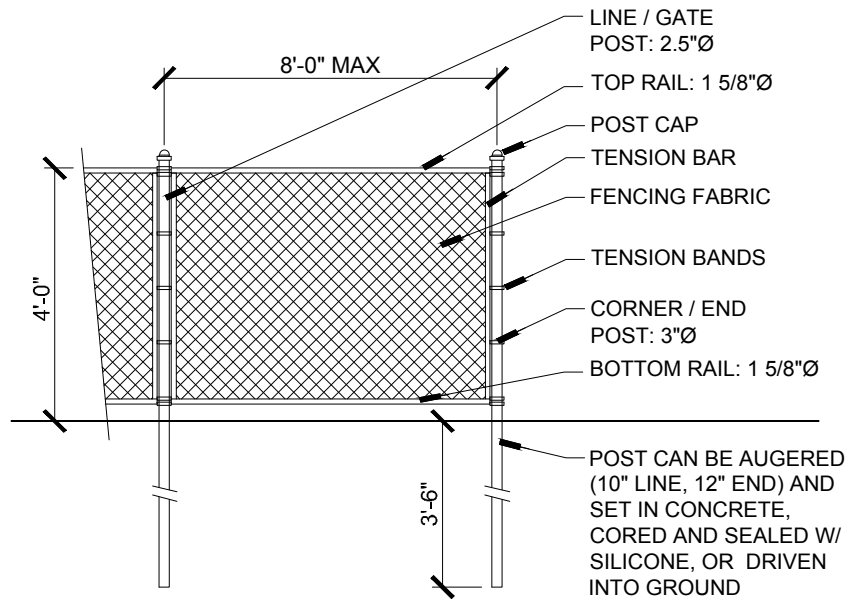

10' HIGH CHAIN LINK FENCE DETAIL

NOT TO SCALE

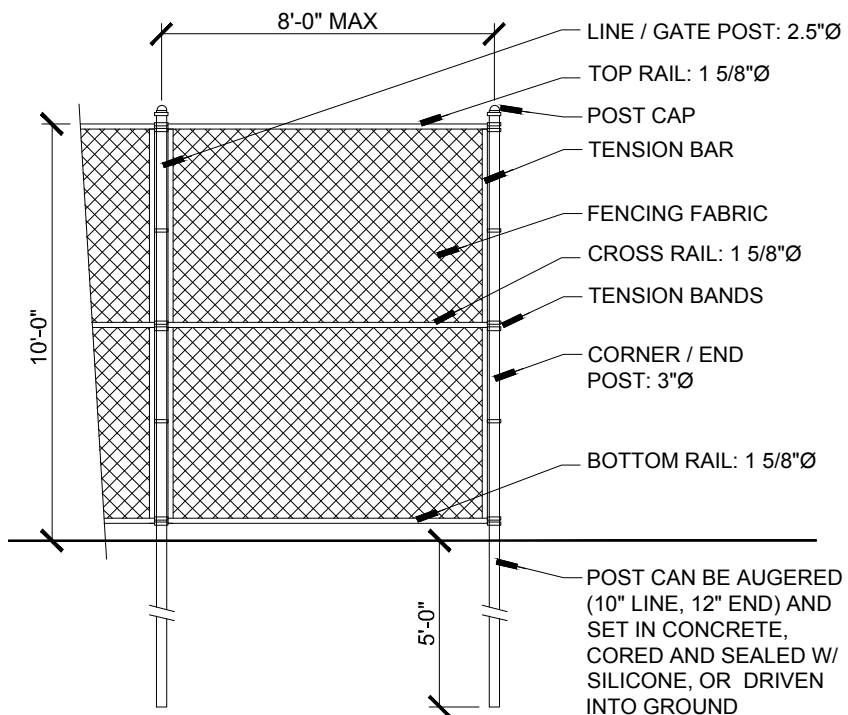

RETURN WITH BID

ACKNOWLEDGEMENT OF RECEIPT OF
ADDENDUM AND FINAL BID FORM

For General Contractor: Sign and return this acknowledgement with your bid proposal.

The undersigned hereby acknowledges receipt of Addendum #1 – Aberdeen Park Pickleball and Tennis Court Renovation, as published by Belvidere Park District on Friday, February 21, 2025, which has been used in preparation of our enclosed bid.

For: _____
Contractor Company - Name

By: _____
Signature of Authorized Person

Date: _____